

SNOWPLOW

BOSSPLOW.COM

See how BOSS continues to BACK YOU UP. Get more info, watch videos, find a dealer or chat live.

Call 800-286-4155 Email sales@bossplow.com





Ask your dealer or visit bossplow.com to explore the complete lineup of BOSS products, including Truck Plows, ATV/UTV Plows, Box Plows, Spreaders and Accessories.



Exclusive to BOSS Owners, joining this community gives you a profile page, a free gift and access to special offers and information on BOSS products and services.



SnowCare for Troops is a nationwide outreach program that performs free snow removal for the families of men and women serving overseas and disabled veterans.



ENHANCED PORTFOLIO * UNIFIED FOCUS * CONTINUED TRUST



BOSS SNOWPLOW PRODUCTS
ARE DESIGNED AND MANUFACTURED IN
AN APPROVED ISO 9001:2008
REGISTERED FACILITY

Patents: www.ttcopats.com

©2016 BOSS PRODUCTS. ALL RIGHTS RESERVED
PRINTED IN LLS A FORM #450.2016

Hardox® is a registered trademark of SSAB Technology. The "f" logo is a registered trademark/service mark of Facebook, Inc. The Twitter bird is a registered trademark/service mark of Twitter, Inc. The YouTube and Google+ logos are registered trademarks/service marks of Google Inc. The "in" logs is a registered service mark of Linkedin Corporation. The Instagram logo is a registered trademark service mark of Instagram, ILC. The Blogger logo is a registered service mark of Google Inc. The National IPA logo is a service mark of the National Intergovernmental Purchasing Alliance Company The TCPN logo is a registered service mark of TCPN Management Group ILC. The Sheffield financia logo is a registered service mark of TCPN Management Group ILC. The Sheffield financia logo is a registered service mark of TCPN Management Group ILC. The Sheffield financia logo is a registered service mark of BBRT Corporation. The Advantage International Registrar logo is a



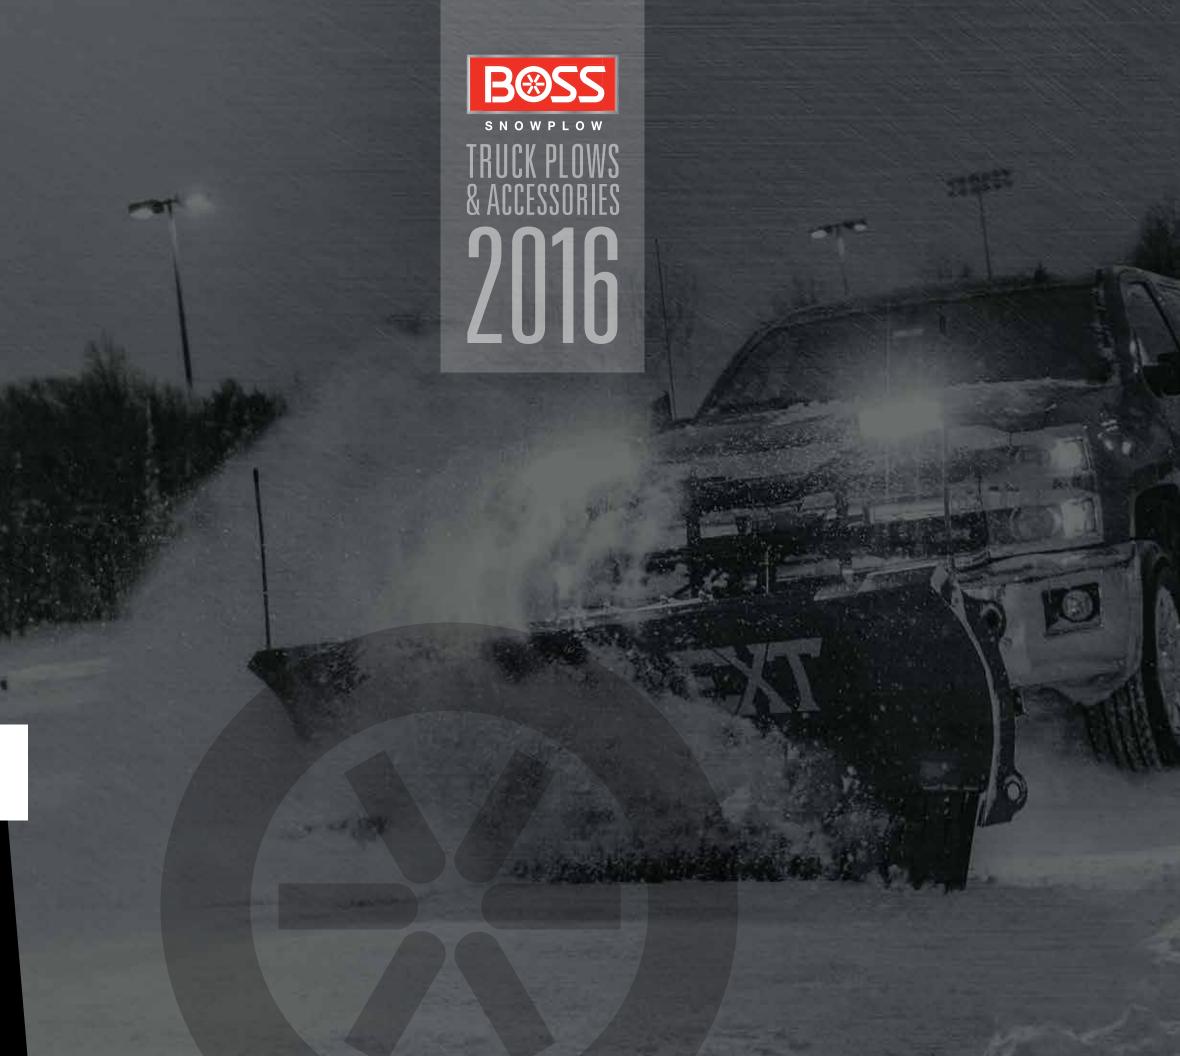


TABLE OF CONTENTS

- **3 BOSS INNOVATIONS**
- 5 **EXT**
- 7 **DXT**
- 9 XT
- 11 STRAIGHT-BLADE PLOWS
- 13 TRIP-EDGE PLOWS
- 15 **HTX**
- 17 MUNICIPAL PLOWS
- 19 ACCESSORIES
- 23 WHAT YOU GET
- 24 SPECIFICATIONS



INNOVATIONS BUILT WITH YOU IN MIND

When winter is at its worst, the job calls for more than muscle, which is why BOSS engineers smart, tough, innovative solutions to make snow and ice removal fast, easy and efficient. With a variety of tripping technologies and features to make your job more productive, BOSS has what today's professionals need to take on winter and RESTORE ORDER.





LEARN MORE ABOUT BOSS PRODUCTS BOSSPLOW.COM



Additional diagonal cross-bracing on BOSS plows helps reinforce the blade structure with overall strength while reducing the possibility of blade twisting (excludes EXT and Standard-Duty plow).

MADE TO LAST

Delivers superior corrosion protection and a long-lasting, high-gloss shine.



DUAL-TRIP TECHNOLOGY

Only the BOSS DXT combines trip-edge and full moldboard trip technology to maximize impact protection.

PATENTED SNOW CATCHER

A proven snow catcher in the center section on EVERY BOSS V-plow ensures that no snow lines are left behind.

HARDOX°

HARDOX® CUTTING EDGES

Optional cutting edges on the DXT are made with Hardox® wear plate, making it one of the longest-lasting cutting edges in the industry.









A NEW ERA IN PLOW LIGHTING

Plow in a whole new light with best-in-class 100% LED lighting, integrated with Ice Shield Technology™ to prevent snow and ice build-up on the lens. Comes standard on all BOSS truck plows.



ATTACH WITH EASE

Attach your plow in just three easy steps with the industry's easiest to use snowplow attachment system.

Smart fitch

FLEET-FLEXIBLE

Quickly and easily swap BOSS plows between trucks in your fleet.

UNDERCARRIAGE

SUPERIOR CONTROL **OPTIONS**

Our high-tech, ergonomic controls feature large, backlit buttons for ease of use.

Smart Touch

SMARTLIGHT™ 3 HEADLIGHT PACKAGE

The SL3 headlight package, standard on every BOSS truck plow, shines brighter and farther than traditional halogen packages and is equipped with Ice Shield Technology.™



EASY TO ATTACH

Flip, plug, click. The three-step attachment process makes it easy to attach any BOSS plow.

CHAINLESS LIFT SYSTEM

BOSS snowplows use a chainless, hydraulic lift system, which greatly reduces snowplow bounce and provides full float capability.

BOSS EXT

PITCHED-FORWARD WINGS

Grab and move large amounts of snow with pitched, scoopedforward wings.

EXPANDING WINGS

Expand quickly at the touch of a button from 8' to 10' (EXT only).

STRENGTH-TO-WEIGHT

BOSS designs maximum snowplow performance and strength in packages that are lighter than some competitive options.

THE ULTIMATE PARKING LOT PLOW

>

EXT STEEL 8' RETRACTED, 10' EXPANDED WITH PITCHED-FORWARD WINGS

The EXT is the latest innovation from BOSS, with expandable wings that enhance productivity and efficiency to put winter in its place. It plows at 8 feet for tighter cuts and expands to 10 feet with pitched-forward wings for optimal productivity, making it the perfect parking lot plow. The EXT is a versatile and flexible addition to your fleet, and another powerful tool in your plowing arsenal that's built to BACK YOU UP.

STANDARD FEATURES:

- > Expandable, Fully Hydraulic Pitched-Forward Wings let you quickly and easily expand from 8' to 10' in width. A true 10' width combined with pitched-forward wings let the EXT take wider passes, carrying and moving more snow more efficiently.
- > SmartLight™ 3 uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- Chainless Hydraulic Cylinder Lifting System greatly reduces bounce during transport and provides full float capability.
- > Standing Tall and Strong at 30 inches high with 9 vertical ribs, the EXT moves a high volume of snow with resilience.
- > Reinforced Moldboard increases blade rigidity for increased durability.
- > High-Performance Hydraulic Package delivers reliability and speed.
- > Enclosed Hydraulics protects against corrosion and hydraulic freeze-up.
- > Two-Year Limited Warranty protects against material defects for peace of mind.

BOSS EXT


> Enhanced Fleet Flexibility comes from the BOSS RT3™ Undercarriage, letting you quickly and easily swap between snowplows in your BOSS fleet.



- Nearly double the light output of standard halogen systems.
- Life expectancy of 8 to 10 years.
- Ice Shield Technology™ heats the lens to prevent ice build-up.
- Standard on all BOSS truck plows.









> 8' retracted straight



> 10' expanded



> Independent wing extension















THE MOST FULLY FEATURED V-PLOW ON THE PLANET



STEEL 8'2", 9'2", 10' POLY 8'2", 9'2"



STAINLESS 8'2", 9'2"

The durable, fully featured BOSS DXTs are the ultimate tools to fight all things snow and ice. Dual-trip design enhances plow protection when striking obstacles in any position and optional Hardox® cutting edges offer extended wear resistance. Flared wings with an enhanced curl throw snow with maximum efficiency and the DXT's multi-position plow blade can quickly and easily switch positions to move large amounts of snow. The smooth running DXT is state of the art for plowing protection and performance.

STANDARD FEATURES:

- > Patented Dual-Trip Design for enhanced plow protection when striking hidden obstacles in any position.
- > SmartLight™ 3 uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice
- > Chainless Hydraulic Cylinder Lifting System greatly reduces bounce during transport and provides full float capability.
- > ½" x 6" Long-Lasting, Durable Base Angle to provide extended wear resistance and comes with built-in curb guards and patented snow catcher.
- > Flared Wings with enhanced curl to throw snow with maximum efficiency.
- > Patented Snow Catcher in the center section is designed to catch snow at the plow's pivot point, so no snow lines are left behind.
- > Reinforced Moldboard increases blade rigidity for increased durability.
- > Heavy-Duty Push Frame and Center Section for additional strength and reliability.
- > High-Performance Hydraulic Package delivers reliability and speed.
- > Enclosed Hydraulics protects against corrosion and hydraulic freeze-up.
- > SmartLock® Cylinders keep blade straight when backdragging.
- > Two-Year Limited Warranty protects against material defects for peace of mind.

9'2" Stainless Steel DXT



HARDOX® Optional cutting edge made with Hardox® wear plate guarantees outstanding resistance to impact while delivering maximum service life and enhanced productivity.

9'2" Steel DXT



The patented and proven snow catcher in the center of every BOSS V-plow is specifically designed to catch snow at the plow's pivot point, so no snow lines are left behind

9'2" Poly DXT



Patented Dual-Trip Design combines Trip-Edge and Full Moldboard Trip technologies on every DXT plow for protection from obstacles in any position, high or low.























STRAIGHT-BLADE PLOWS



Push back the chaos and RESTORE ORDER with BOSS Standard-Duty and Super-Duty Straight-Blade Plows. The durable Steel Straight-Blade features a baked-on powder-coat paint finish with zinc primer to resist corrosion and the superslick polyethylene moldboard of the Poly Straight-Blade prevents snow from sticking. BOSS Super-Duty Straight-Blades are also available in high-grade corrosion-resistant stainless steel. Every BOSS Straight-Blade features a heavy-duty push frame and quadrant, optimized blade curl and reinforced moldboard, providing reliability and strenath.

STANDARD FEATURES:

- > Full Moldboard Trip Design helps to prevent plow damage when an obstacle is encountered.
- > SmartLight™ 3 uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- > Chainless Hydraulic Cylinder Lifting System greatly reduces bounce during transport and provides full float capability.
- > Cast-Iron Plow Shoes provide extended wear resistance compared to steel shoes.
- > Blade Shock Absorber stabilizes and cushions the trip action.
- > Reinforced Moldboard increases blade rigidity for increased durability (Super-Duty only).
- > Heavy-Duty Push Frame and Quadrant for additional strength
- > High-Performance Hydraulic Package delivers reliability and speed.
- > Enclosed Hydraulics protects against corrosion and hydraulic
- > Two-Year Limited Warranty protects against material defects for


















SUPER-DUTY

SSPLOW.COM



POWER THROUGH **EVERY OBSTACLE**

STEEL 7'6", 8', 9' STEEL for Skid Steer 7'6", 8', 9' STAINLESS STEEL 7'6", 8', 9' STAINLESS STEEL for Skid Steer 7'6", 8', 9'

BOSS Trip-Edge Snowplows are engineered to power through the heaviest snow and any obstacles that come with it. The extra-rigid moldboard and trip-edge technology ensure that only the cutting edge trips when you hit an obstacle, so you won't lose the load you're pushing. Trip-Edge Snowplows feature four adjustable trip return springs, so you can customize the trip spring tension for the job at hand. Available in steel and stainless steel for both pickup truck and skid steer applications, BOSS Trip-Edge Snowplows are built to BACK YOU UP.

13

STANDARD TRUCK PLOW FEATURES:

- > Trip-Edge Design helps to prevent plow damage when an obstacle is encountered.*
- > SmartLight[™] 3 uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- > Chainless Hydraulic Cylinder Lifting System greatly reduces bounce during transport and provides full float capability.
- > Adjustable Trip Springs allow you to customize the trip spring tension.
- > Cast-Iron Plow Shoes provide extended wear resistance compared to steel shoes.*
- > Reinforced Moldboard increases blade rigidity for increased durability.*
- > Heavy-Duty Push Frame and Quadrant for additional strength and reliability.*
- > High-Performance Hydraulic Package delivers reliability
- > Enclosed Hydraulics protects against corrosion and hydraulic freeze-up.
- > Two-Year Limited Warranty protects against material defects for peace of mind.
- *See additional bullet under skid steer.



STANDARD SKID STEER PLOW FEATURES:

- > Universal Tool Carrier allows for simple and fast hookup; just drive in and connect the two hydraulic couplers.
- > Adjustable Mounting Height accommodates both track and wheel skid steer loaders.
- > Built-In Side-to-Side Float contours to what you're plowing.
- *Blade features same as truck plow.





















FOR LIGHTER-DUTY & HALF-TON TRUCKS WITH HEAVY-DUTY WORKLOADS

- POLY, STEEL STRAIGHT-BLADE 7', 7'6" STEEL V-PLOW 7'6"
- STAINLESS STEEL STRAIGHT-BLADE 7', 7'6"

Our full line of HTX plows brings all the power and innovation of BOSS V-plows and Straight-Blades to your light-duty truck. With today's contractor and homeowner in mind, BOSS has engineered the HTX line for today's lighter-duty and half-ton trucks by putting just the right amount of steel in exactly the right place for the best combination of strength and weight. The precisely crafted, ultra-efficient HTX line is built to handle the biggest of jobs. Because when you need to RESTORE ORDER with your lighter-duty truck, BOSS is always there to BACK YOU UP.

STANDARD FEATURES:

- > Full Moldboard Trip Design helps to prevent plow damage when an obstacle is encountered.
- > SmartLight™ 3 uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- > Chainless Hydraulic Cylinder Lifting System greatly reduces bounce during transport and provides full float capability.
- > Strong, Durable Push Frame and Quadrant designed for additional strength and reliability.
- > High-Performance Hydraulic Package delivers reliability and speed.
- > Enclosed Hydraulics protects against corrosion and hydraulic
- peace of mind.











> Two-Year Limited Warranty protects against material defects for













BOSS EXTENDED FAMILY

GIVING YOU EVERYTHING YOU NEED TO REPORT OF THE REPORT OF



QUESTIONS? CHAT LIVE ONLINE. **BOSSPLOW.COM**



Ask your BOSS Dealer or visit bossplow.com to browse the full family of BOSS products, including Truck Plows, ATV/UTV Plows, Box Plows, Spreaders, Accessories and more.

DON'T FORGET TO ASK ABOUT ZERO DOWN FINANCING WITH NO PAYMENTS AND NO INTEREST FOR 6 MONTHS.*



HEAVY-DUTY PLOWING POWER



HEAVY-DUTY STRAIGHT-BLADE STEEL 9', 10' DXT STEEL 10'

If you're looking for larger, municipal-grade plows, BOSS has what you want. Designed for medium-duty trucks, the BOSS Heavy-Duty Straight-Blades feature a reinforced moldboard with enhanced blade curl to power through deep, wet snow. The versatility of the dual-trip BOSS DXT allows you to scoop, stack and punch through hard-packed banks with power and performance. They come standard with the SL3 light system with Ice Shield Technology™ to handle every job, even in the worst conditions. Because when it's on you to RESTORE ORDER, BOSS is always there to BACK YOU UP.



10' DXT Steel

STANDARD FEATURES:

- > Patented Dual-Trip Technology on the DXT combines trip-edge and full moldboard trip technology to maximize impact protection.
- > SmartLight™ 3 uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- Chainless Hydraulic Cylinder Lifting System greatly reduces bounce during transport and provides full float capability.
- > ½" x 6" Long-Lasting, Durable Base Angle to provide extended wear resistance and comes with built-in curb guards and patented snow catcher (DXT only).
- > Cast-Iron Plow Shoes provide extended wear resistance compared to steel shoes (optional on 10' DXT).
- Full Moldboard Trip Design helps to prevent plow damage when an obstacle is encountered (straight-blade only).
- Dual Shock Absorbers stabilize and cushion the trip action (straight-blade only).
- > Heavy-Duty Push Frame and Quadrant designed for additional strength and reliability (straight-blade only).
- > Reinforced Moldboard increases blade rigidity for increased durability.
- > High-Performance Hydraulic Package delivers reliability and speed.
- > Enclosed Hydraulics protects against corrosion and hydraulic freeze-up.
- > Two-Year Limited Warranty protects against material defects for peace of mind.











BOSS SNOWPLOW AUTHORIZED ACCESSORIES

CONTROL OPTIONS





(with or without handle)



MOUNTING OPTIONS

Attach the versatile SmartTouch® 2 Handheld Control to a pedestal mount or mount it on your dash (with or without handle).

PEDESTAL MOUNT	MSC09658
DASHBOARD MOUNT	MSC09660

ATTACHMENT SYSTEMS





NGE PISTOL GRIP

The new Pistol Grip Controller features a unique ergonomic design, with a thumb controlled joystick and trigger finger raise and lower buttons for ease of use even during the longest snow events. Pistol Grip Controller can be used for both straight-blade and V-plows. Available only with Next Generation Electrical system. The Next Generation Electrical system eliminates the connector pins for a cleaner appearance, easier attachment and increased reliability. Talk to your BOSS Dealer today. (Not compatible with SL3 with Ice Shield Technology.™)

NGE SYSTEM WITH PISTOL GRIP (STRAIGHT OR V-PLOW)	MSC17819
NGE CONTROL KIT WITH SMARTTOUCH 2 (V-PLOW)	MSC17002
NGE CONTROL KIT WITH SMARTTOUCH 2 (STRAIGHT)	STB17003

JOYSTICK CONTROL

If you prefer the feel of a joystick, opt for this versatile accessory, featuring a lighted on/off switch and right or left hand adjustment.

STRAIGHT-BLADES	STB03191
V.PI OWS	Mecuseud



SNOWPLOW SIGHT SYSTEM

Optional for all BOSS snowplows featuring the SmartLight™ 2 lighting system, our exclusive Snowplow Sight System allows you to align your truck and plow from inside your cab for hookups on the first try, every time. This system makes the fastest plow attachment system even faster and easier. Not compatible with SL3 with Ice Shield Technology.™

SNOWPLOW SIGHT SYSTEM.. . MSC09644



BLADE ENHANCEMENT

PLOW WINGS

Increasing your blade width by a full 22" at a 30-degree angle, these convenient poly plow wings will cut your plowing time and attach and detach within seconds (excludes HTX and Heavy-Duty plows).

STRAIGHT-BLADE	MSC08042C
XT AND DXT PLOWS	MSC08063B

(Excludes HTX plows & Heavy-Duty plows. The only DXT models recommended for plow wing extensions are the 8'2" Steel DXT and 8'2" Poly DXT. Wing extensions do fit other DXT sizes and do not void the warranty but are not recommended, as the blade may sag when in the scoop position, due to the weight of the wing extensions.)





HIGH-PERFORMANCE V-PLOW CUTTING EDGE

Featuring built-in curb guards and patented snow catcher, our patented V-plow cutting edge is made of Hardox® that delivers extended wear resistance compared to conventional cutting edges.

7'6" DRIVER SIDE	BAL08857
7'6" PASSENGER SIDE	BAR08856
8'2" DRIVER SIDE	BAL08859
8'2" PASSENGER SIDE	BAR08858
9'2" DRIVER SIDE	BAL08861
9'2" PASSENGER SIDE	BAR08860
10' DXT DRIVER SIDE	BAL17580
10' DXT PASSENGER SIDE	BAR17590

CURB GUARDS

Protect the edge of your plow with these long-lasting, high-impact curb guards. Fits all BOSS V-plows and straight-blade snowplow models (except HTX and Sport-Duty).

STRAIGHT-BLADE DRIVER SIDE	STB03395
STRAIGHT-BLADE PASSENGER SIDE	STB03394
STRAIGHT-BLADE HEAVY-DUTY DRIVER SIDE	STB04364
STRAIGHT-BLADE HEAVY-DUTY PASSENGER SIDE	STB04363

RUBBER SNOW DEFLECTOR

For increased visibility and safety, keep snow from blowing onto your windshield with a rugged snow deflector specifically designed for BOSS snowplows.

7' AND 7'6" HTX AND 7'6" STANDARD-DUTY	
STRAIGHT-BLADE PLOWS	MSC04587B
7'6"-9'2" V-PLOWS AND 7'6"-9'0" SUPER-DUTY	
STRAIGHT-BLADE PLOWS	MSC01565
10' DXT, EXT AND HEAVY-DUTY	
STRAIGHT-BLADE PLOWS	MSC17611B



URETHANE CUTTING EDGE

BOSS now offers a full line of Urethane Cutting Edges to cover our entire line of straight-blade plows. Ranging from 7' all the way up to 10', the edges offer between 1" to 2" of material thickness based on blade application and are reversible with a built-in bevel for optimum scraping performance. All necessary mounting hardware is included in the kit.

7' X 6" X 1" HTX/SPORT-DUTY STRAIGHT-BLADE (7')	STB09231
7'6" X 6" X 1" HTX/SPORT-DUTY STRAIGHT-BLADE (7'6")	STB09232
7'6" X 8" X 1½" STD AND SUPER-DUTY STRAIGHT-BLADE (7'6")	STB09233
8' X 8" X 1½" SUPER-DUTY STRAIGHT-BLADE (8')	STB09234
8'6" X 8" X 1½" SUPER-DUTY STRAIGHT-BLADE (8'6")	STB09235
9' X 8" X 1½" SUPER-DUTY STRAIGHT-BLADE (9')	STB09236
10' X 8" X 2" HEAVY-DUTY STRAIGHT-BLADE (10')	STB09237



WALK BEHIND PUSH SPREADERS

BROADCAST WALK BEHIND SPREADER

Spread up to 80 pounds of material easily with the BOSS Broadcast Spreader. Included are adjustable front and side baffles, weather cover and grate.

- 80 lb Capacity
- Spreads dry, free-flowing salt and deicers
- · Adjustable Front and Side Baffles
- Enclosed Metal Gears
- Weather Cover
- Gear Cover limited lifetime gear warranty
- 12" Pneumatic Tire

BROADCAST WALK BEHIND SPREADER. WBS15850



MAINTENANCE

TOUCH-UP PAINT

Cover chips and scrapes the professional way with BOSS touch-up paint.

RED, SPRAY PAINT	MSC04098
BLACK, SPRAY PAINT	MSC04036
RED, QUART	MSC04358

HIGH-PERFORMANCE HYDRAULIC FLUID

This specially formulated hydraulic fluid maintains its viscosity from normal use to temperatures as low as -40°F.

GALLON	HYD01836
QUART	.HYD01835

EMERGENCY PARTS KITS

These kits feature the most useful replacement parts, packaged in a convenient soft-sided case that fits easily behind the seat of your truck (excludes 10' DXT, EXT and Heavy-Duty Straight-Blades).

V-PLOW EMERGENCY PARTS KIT	MSC04298
STRAIGHT-BLADE EMERGENCY PARTS KIT	STB16187







STABILITY & PERFORMANCE

REPLACEMENT BUMPER TRIM KIT

This kit eliminates the need to cut or modify a portion of the OEM bumper to access the push beam's hooks. The kits utilize the factory mounting holes and give the plow vehicle an attractive, finished OEM look when installed. If the truck is going to be sold, the original bumper piece can be reinstalled to look like new.

BUMPER TRIM KIT, 2014-2015 CHEVY 1500	MSC09409
BUMPER TRIM KIT, 2015 + CHEVY 2500/3500	MSC09279
BUMPER TRIM KIT, 2014-2015 GMC 1500	MSC09290
BUMPER TRIM KIT, 2015 + GMC 2500/3500	MSC09295
BUMPER TRIM KIT, 2016 + GMC 1500	MSC18870
BUMPER TRIM KIT, 2016 + CHEVY 1500	MSC18880



SMARTLOCK® CYLINDERS

Keep your V-plow locked securely in the straight position while backdragging, with these easy to install locking cylinders.

PRE-2006 V-PLOWS	HYD07130
2006 & NEWER V-PLOWS	
2006 & NEWED 10! V DLOWS AND 10! DVT DLOWS	UVDAGGG



CAST-IRON PLOW SHOES

These ultra-rugged cast-iron shoes deliver extended wear resistance compared to conventional steel shoes.

PLOW SHOE ASSEMBLY*	MSC01570
HTX PLOW SHOE BRACKET OPTION KIT (SHOES INCLUDED)	MSC09588
TRIP-EDGE PLOW SHOE ASSEMBLY	TRP07880
DXT PLOW SHOE BRACKET OPTION KIT (SHOES NOT INCLUDED)	MSC18207
*DXT and HTX blades now include Plow Shoe Brackets as standard. Shoes sold so	eparately.







V-Blade Dolly Wheel Kit**

CASTER (DOLLY) WHEELS

Ideal for moving your plow around in the garage or service bay, these dolly wheels utilize existing shoe holders on the blade and make moving the plow a breeze. These heavy-duty wheels feature steel ball bearings for smooth movement and long-lasting life. Separate kits are available for straight-blades and V-plows. Excludes: Trip-Edge Straight-Blade, Skid Steer, 10' DXT and Heavy-Duty Straight-Blade plows.

CASTER KIT, STRAIGHT-BLADE	MSC09215
CASTER KIT, V-PLOW (INCLUDES XT)	MSC09216
CASTER KIT, HTX (COVERS 7', 7'6")	MSC09249
CASTER KIT, DXT	MSC01141
CASTER KIT, HTX-V	
,	

^{**}Dolly wheel color may vary

BALLAST RETAINER KIT

Use the ballast retainer kit to hold sandbags securely in place in order to provide enhanced performance.

MSC09845



22

21





+ BLADE

Steel, stainless, poly – whichever you choose, it's durable and reliable.



+ SMARTLIGHT™ 3

SL3 100% LED lights with Ice Shield Technology™ to prevent snow and ice build-up.



+ PUSH FRAME/COUPLER

The powerful reinforced steel framework behind your plow.



+ UNDERCARRIAGE

Serves as the connection point from the plow to the truck.



+ HYDRAULICS & CONTROLLER

An intuitive, easy-to-use system completely protected from the elements.



+ ATTACHMENT SYSTEM

A three-step, fully hydraulic system for quick and easy attachment.



+ CUTTING EDGE OR BASE ANGLE

A durable cutting edge designed for precision and performance. On DXT models, the base angle serves as a cutting edge until worn.



+ WORLD-CLASS SUPPORT

From our dealer network and factory customer support to our Owners Group, BOSS is there to BACK YOU UP.

PERSONAL-USE PLOWS

VEHICLE APPLICATION: LIGHT-DUTY, 4X4s, 1/2-TON TRUCKS AND SUVs

HTX V AND STRAIGHT-BLADE

SPECIFICATIONS	7'6" HTX V-Plow Steel	7' Steel / Poly / Stainless HTX	7'6" Steel / Poly / Stainless HTX
Blade Width (Straight)	90" (229 cm)	84" (213 cm)	90" (229 cm)
Plowing Width @ 30° Angle	78" (198 cm)	73" (185 cm)	78" (198 cm)
Blade Height	32" (81 cm) at end, 25" (63 cm) at center	26" (66 cm)	26" (66 cm)
Plowing Width (V position)	81" (206 cm)	N/A	N/A
Plowing Width (Scoop)	74" (188 cm)	N/A	N/A
Blade Thickness	14-ga Steel	14-ga (0.19 cm) Mild Steel / ½" (0.6 cm) Poly / 14-ga (0.19 cm) Stainless Steel	14-ga (0.19 cm) Mild Steel / ¼" (0.6 cm) Poly / 14-ga (0.19 cm) Stainless Steel
Cutting Edge	%" x 6" (0.95 cm x 15 cm)	1/4" x 6" (0.6 cm x 15 cm)	1/2" x 6" (1 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	4 vertical, 2 diagonal	6 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs	2	2	2
SmartLock Cylinders	11/4" x 81/4" (3 cm x 21 cm)	N/A	N/A
Angle Cylinders	N/A	1½" x 6½" (4 cm x 17 cm)	1½" x 6½" (4 cm x 17 cm)
Lift Cylinder	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	N/A	N/A	N/A
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	490 lb ^A (222 kg)	393 lb ^a (178 kg) / 367 lb ^a (166 kg) / 393 lb ^a (178 kg)	440 lb ^a (200 kg) / 416 lb ^a (188 kg) / 440 lb ^a (200 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

^{*}Plow weight does not include vehicle mount weight. AVehicle mount weight range: 45-75 lb (20-34 kg).

VEHICLE APPLICATION: 4X4s, 3/4 AND 1-TON TRUCKS

EXT

SPECIFICATIONS	EXT
Blade Width (Retracted)	96" (244 cm)
Blade Width (Extended)	120" (305 cm)
Plowing Width @ 30° Angle	83" (211 cm)-IN, 103" (262 cm)-OUT
Blade Height	30"
Blade Thickness	11-ga Steel
Cutting Edge	½" AR450
Reinforcement Ribs	9 vertical
Plow Shoes	Optional
Trip Springs	4
Angle Cylinders	1½" x 10" (4 cm x 25 cm)
Wing Cylinders	1½" x 11/8" x 123/4" (4 cm x 3 cm x 32 cm)
Lift Cylinder	2" x 11/8" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	1
Attachment System	SmartHitch 2
Plow Weight*	970 lb ⁸
Plow Lights	SL3 L.E.D. with Ice Shield Technology

^{*}Plow weight does not include vehicle mount weight. BVehicle mount weight range: 75-105 lb (34-47 kg).

TWO-YEAR LIMITED WARRANTY

ALL BOSS SNOWPLOWS AND EQUIPMENT ARE GUARANTEED TO BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP FOR TWO FULL YEARS FROM THE DATE OF PURCHASE. STOP BY ANY AUTHORIZED BOSS DEALER TO RECEIVE COMPLETE DETAILS ON OUR TWO-YEAR PARTS AND LABOR WARRANTY. PLEASE VISIT BOSSPLOW.COM FOR MORE DETAILS.

VEHICLE APPLICATION: 4X4s, 1/2 AND 3/4-TON TRUCKS AND SUVS STANDARD-DUTY STRAIGHT-BLADE

SPECIFICATIONS	7'6" Standard-Duty Steel
Blade Width (Straight)	90" (229 cm)
Plowing Width @ 30° Angle	78" (198 cm)
Blade Height	27½" (70 cm)
Blade Thickness	14-ga high-strength Steel
Cutting Edge	%" x 6" (1 cm x 15 cm)
Reinforcement Ribs	7 vertical
Plow Shoes	Cast iron
Trip Springs	3
Angle Cylinders	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 11/6" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	1
Attachment System	SmartHitch 2
Plow Weight*	597 lb ^s (271 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology

^{*}Plow weight does not include vehicle mount weight.

BVehicle mount weight range: 75-105 lb (34-47 kg).

LEGAL STATEMENT

VEHICLES INTENDED TO BE EQUIPPED WITH A SPREADER AND/OR SNOWPLOW MUST COMPLY WITH THE VEHICLE MANUFACTURERS' SPECIFICATIONS FOR EQUIPMENT APPLICATION. BOSS PRODUCTS RESERVES THE RIGHT UNDER ITS PRODUCT IMPROVEMENT POLICY TO CHANGE CONSTRUCTION OR DESIGN DETAILS AND FURNISH EQUIPMENT WHEN SO ALTERED WITHOUT REFERENCE TO ILLUSTRATIONS OR SPECIFICATIONS USED HEREIN. BOSS PRODUCTS MAY BE PROTECTED BY ONE OR MORE PATENTS; PLEASE SEE BOSSPLOW.COM FOR MORE DETAILS.

PROFESSIONAL-USE PLOWS

VEHICLE APPLICATION: 4X4s, ½ TO 1-TON TRUCKS AND SUVs

SUPER-DUTY STRAIGHT-BLADE

SPECIFICATIONS	7'6" Super-Duty Steel	8' Super-Duty Steel	8'6" Super-Duty Steel	9' Super-Duty Steel**
Blade Width (Straight)	90" (229 cm)	96" (244 cm)	102" (259 cm)	108" (274 cm)
Plowing Width @ 30° Angle	78" (198 cm)	83" (211 cm)	88" (224 cm)	93½" (238 cm)
Blade Height	29" (74 cm)	29" (74 cm)	29" (74 cm)	29" (74 cm)
Blade Thickness	11-ga Steel	11-ga Steel	11-ga Steel	11-ga Steel
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal
Plow Shoes	Cast iron	Cast iron	Cast iron	Cast iron
Trip Springs	4	4	4	4
Angle Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1%" x 10" (5 cm x 3 cm x 25 cm)	2" x 11/6" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	1	1	1	1
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	680 lb ⁸ (308 kg)	698 lb ^B (317 kg)	720 lb ^B (327 kg)	742 lb ^B (337 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology
SPECIFICATIONS	7'6" Super-Duty Poly	8' Super-Duty Poly	8' Super-Duty Stainless	9' Super-Duty Stainless
SPECIFICATIONS Blade Width (Straight)	7'6" Super-Duty Poly 90" (229 cm)	8' Super-Duty Poly 96" (244 cm)	8' Super-Duty Stainless 96" (244 cm)	9' Super-Duty Stainless 108" (274 cm)
Blade Width (Straight)	90" (229 cm)	96" (244 cm)	96" (244 cm)	108" (274 cm)
Blade Width (Straight) Plowing Width @ 30° Angle	90" (229 cm) 78" (198 cm)	96" (244 cm) 83" (211 cm)	96" (244 cm) 83" (224 cm)	108" (274 cm) 93½" (238 cm)
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height	90" (229 cm) 78" (198 cm) 29" (74 cm)	96" (244 cm) 83" (211 cm) 29" (74 cm)	96" (244 cm) 83" (224 cm) 29" (74 cm)	108" (274 cm) 93½" (238 cm) 29" (74 cm)
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height Blade Thickness	90" (229 cm) 78" (198 cm) 29" (74 cm) ¾" (1 cm) Poly	96" (244 cm) 83" (211 cm) 29" (74 cm) %" (1 cm) Poly	96" (244 cm) 83" (224 cm) 29" (74 cm) 14-ga 304 Stainless	108" (274 cm) 93½" (238 cm) 29" (74 cm) 14-ga 304 Stainless
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height Blade Thickness Cutting Edge	90" (229 cm) 78" (198 cm) 29" (74 cm) %" (1 cm) Poly ½" x 6" (1.3 cm x 15 cm)	96" (244 cm) 83" (211 cm) 29" (74 cm) ¾" (1 cm) Poly ½" x 6" (1.3 cm x 15 cm)	96" (244 cm) 83" (224 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm)	108" (274 cm) 93½" (238 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm)
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height Blade Thickness Cutting Edge Reinforcement Ribs	90" (229 cm) 78" (198 cm) 29" (74 cm) %" (1 cm) Poly ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal	96" (244 cm) 83" (211 cm) 29" (74 cm) %" (1 cm) Poly %" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal	96" (244 cm) 83" (224 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal	108" (274 cm) 93½" (238 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height Blade Thickness Cutting Edge Reinforcement Ribs Plow Shoes	90" (229 cm) 78" (198 cm) 29" (74 cm) %" (1 cm) Poly ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal	96" (244 cm) 83" (211 cm) 29" (74 cm) %" (1 cm) Poly %" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal	96" (244 cm) 83" (224 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal	108" (274 cm) 93½" (238 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height Blade Thickness Cutting Edge Reinforcement Ribs Plow Shoes Trip Springs	90" (229 cm) 78" (198 cm) 29" (74 cm) %" (1 cm) Poly ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4	96" (244 cm) 83" (211 cm) 29" (74 cm) %" (1 cm) Poly %" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4	96" (244 cm) 83" (224 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4	108" (274 cm) 93½" (238 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height Blade Thickness Cutting Edge Reinforcement Ribs Plow Shoes Trip Springs Angle Cylinders	90" (229 cm) 78" (198 cm) 29" (74 cm) %" (1 cm) Poly ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm)	96" (244 cm) 83" (211 cm) 29" (74 cm) %" (1 cm) Poly %" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1%" x 10" (4 cm x 25 cm)	96" (244 cm) 83" (224 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm)	108" (274 cm) 93½" (238 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm)
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height Blade Thickness Cutting Edge Reinforcement Ribs Plow Shoes Trip Springs Angle Cylinders Lift Cylinder	90" (229 cm) 78" (198 cm) 29" (74 cm) %" (1 cm) Poly ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm)	96" (244 cm) 83" (211 cm) 29" (74 cm) %" (1 cm) Poly %" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1%" x 10" (4 cm x 25 cm)	96" (244 cm) 83" (224 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm)	108" (274 cm) 93½" (238 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm)
Blade Width (Straight) Plowing Width @ 30° Angle Blade Height Blade Thickness Cutting Edge Reinforcement Ribs Plow Shoes Trip Springs Angle Cylinders Lift Cylinder Shock Absorber	90" (229 cm) 78" (198 cm) 29" (74 cm) %" (1 cm) Poly %" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm) 2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	96" (244 cm) 83" (211 cm) 29" (74 cm) %" (1 cm) Poly %" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1%" x 10" (4 cm x 25 cm) 2" x 1%" x 10" (5 cm x 3 cm x 25 cm)	96" (244 cm) 83" (224 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm) 2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	108" (274 cm) 93%" (238 cm) 29" (74 cm) 14-ga 304 Stainless ½" x 6" (1.3 cm x 15 cm) 7 vertical, 2 diagonal Cast iron 4 1½" x 10" (4 cm x 25 cm) 2" x 1%" x 10" (5 cm x 3 cm x 25 cm)

^{*}Plow weight does not include vehicle mount weight. *Vehicle mount weight range: 75-105 lb (34-48 kg). **Includes 1-ton trucks with dual rear wheels.

VEHICLE APPLICATION: 1/2 TO 1-TON TRUCKS, SUVs AND SKID STEERS

TRIP-EDGE SUPER-DUTY STRAIGHT-BLADE

SPECIFICATIONS	7'6" Trip-Edge Steel/Skid Steer	8' Trip-Edge Steel/Skid Steer	9' Trip-Edge Steel/Skid Steer**	7'6" Trip-Edge Stainless/Skid Steer	8' Trip-Edge Stainless/Skid Steer	9' Trip-Edge Stainless/Skid Steer
Blade Width (Straight)	90" (229 cm)	96" (244 cm)	108" (274 cm)	90" (229 cm)	96" (244 cm)	108" (274 cm)
Plowing Width @ 30° Angle	78" (198 cm)	83" (211 cm)	93½" (238 cm)	78" (198 cm)	83" (211 cm)	93½" (238 cm)
Blade Height	31" (79 cm)					
Blade Thickness	11-ga Steel	11-ga Steel	11-ga Steel	14-ga 304 Stainless	14-ga 304 Stainless	14-ga 304 Stainless
Base Angle	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Cast iron					
Trip Springs	4	4	4	4	4	4
Trip Pivot Pin Diameter	1" (3 cm)					
Trip Spring Type	%" (1 cm) hooked extension spring					
Trip-Edge Adjustable	Standard	Standard	Standard	Standard	Standard	Standard
Angle Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1%" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1%" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1%" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2 / Universal tool carrier					
Plow Weight*	796 lb ^B (361 kg) / 798 lb ^B (362 kg)	825 lb ^B (372 kg) / 809 lb ^B (367 kg)	877 lb ^B (399 kg) / 857 lb ^B (389 kg)	853 lb ⁸ (387 kg) / 826 lb ⁸ (375 kg)	875 lb ⁸ (397 kg) / 836 lb ⁸ (379 kg)	934 lb ^B (424 kg) / 888 lb ^B (403 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology					

^{*}Plow weight does not include vehicle mount weight.

VEHICLE APPLICATION: 4X4s, 3/4 AND 1-TON TRUCKS AND SUVs

XT

SPECIFICATIONS	7'6" XT Steel	8'2" XT Steel	9'2" XT SteeI**	8'2" XT Poly	9'2" XT Poly**
Blade Width (Straight)	90" (229 cm)	98" (249 cm)	110" (279 cm)	98" (249 cm)	110" (279 cm)
Plowing Width (V position)	81" (206 cm)	88" (224 cm)	99" (252 cm)	88" (224 cm)	99" (252 cm)
Plowing Width (Scoop)	74" (188 cm)	81" (206 cm)	92" (234 cm)	81" (206 cm)	92" (234 cm)
Plowing Width @ 30° Angle	77" (196 cm)	85" (216 cm)	95" (241 cm)	85" (216 cm)	95" (241 cm)
Blade Height	36" (91 cm) at end, 30" (76 cm) at center	37" (94 cm) at end, 30" (76 cm) at center	38" (96.52 cm) at end, 30" (76 cm) at center	37" (94 cm) at end, 30" (76 cm) at center	38" (96.52 cm) at end, 30" (76 cm) at center
Blade Thickness	14-ga Steel	11-ga Steel	11-ga Steel	3/8" (1 cm) Poly	3/4" (1 cm) Poly
Cutting Edge (AR450)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional	Optional	Optional
Trip Springs	4	4	4	4	4
SmartLock Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1%" x 10" (5 cm x 3 cm x 25 cm)	2" x 1%" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 11/4" x 10" (5 cm x 3 cm x 25 cm)	2" x 11/4" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	713 lb ⁸ (323 kg)	785 lb ⁸ (356 kg)	842 lb ⁸ (382 kg)	795 lb ⁸ (361 kg)	852 lb ⁸ (387 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

^{*}Plow weight does not include vehicle mount weight. ⁸Vehicle mount weight range: 75-105 lb (34-48 kg).

VEHICLE APPLICATION: 4X4s, ¾ AND 1-TON TRUCKS AND SUVs, MEDIUM-DUTY TRUCKS 14,000-27,000 GVWR (10' ONLY)

DXT

SPECIFICATIONS	8'2" Steel / Poly / Stainless DXT	9'2" Steel / Poly / Stainless DXT	10' Steel Heavy-Duty DXT
Blade Width (Straight)	98" (249 cm)	110" (279 cm)	120" (305 cm)
Blade Width (V)	88" (224 cm)	99" (251 cm)	107" (272 cm)
Blade Width (Scoop)	81" (206 cm)	92" (234 cm)	102" (259 cm)
Plowing Width @ 30° Angle	85" (216 cm)	95" (241 cm)	104" (264 cm)
Blade Height	30" (76 cm) at center, 37½" (95 cm) at end	30" (76 cm) at center, 37½" (95 cm) at end	35" (88 cm) at center, 45" (114 cm) at end
Blade Thickness	11-ga Steel / 3/8" Poly / 12-ga 304 Stainless Steel	11-ga Steel / %" Poly / 12-ga 304 Stainless Steel	11-ga Steel
Base Angle	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	8 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs (Moldboard)	4 Extension Springs	4 Extension Springs	4 Extension Springs
Trip Springs (Base Angle)	3 Torsion Springs (per blade half)	3 Torsion Springs (per blade half)	3 Torsion Springs (per blade half)
SmartLock Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	2" x 10" (5.08 cm x 25.4 cm)
Lift Cylinder	2" x 11/6" x 10" (5 cm x 3 cm x 25 cm)	2" x 11/6" x 10" (5 cm x 3 cm x 25 cm)	2½" x 1½" x 12" (5.72 cm x 2.86 cm x 30.48 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	$868\ lb^{\scriptscriptstyle c}$ (394 kg) / 878 lb $^{\scriptscriptstyle c}$ (398 kg) / 920 lb $^{\scriptscriptstyle c}$ (417 kg)	925 lbc (420 kg) / 935 lbc (424 kg) / 977 lbc (433 kg)	1,205 lb ^c (547 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

MUNICIPAL-USE PLOWS

VEHICLE APPLICATION:

MEDIUM-DUTY TRUCKS 14,000-27,000 GVWR

HEAVY-DUTY STRAIGHT-BLADE

10' DXT (SPECIFICATIONS LISTED ABOVE)

SPECIFICATIONS	9' Heavy-Duty Straight-Blade	10' Heavy-Duty Straight-Blade
Blade Width (Straight)	108" (274 cm)	120" (305 cm)
Plowing Width @ 30° Angle	94" (239 cm)	104" (264 cm)
Blade Height	34½" (88 cm)	34½" (88 cm)
Blade Thickness	7-ga Steel	7-ga Steel
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	8 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Cast iron	Cast iron
Trip Springs	6	6
Angle Cylinders	2" x 10" (5 cm x 25 cm)	2" x 10" (5 cm x 25 cm)
Lift Cylinder	2¼" x 1½" x 12" (6 cm x 3 cm x 31 cm)	2½" x 1½" x 12" (6 cm x 3 cm x 31 cm)
Shock Absorber	2	2
Attachment System	SmartHitch 2	SmartHitch 2
Plow Weight*	1,152 lbc (523 kg)	1,205 lbc (547 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

^{*}Plow weight does not include vehicle mount weight. °Vehicle mount weight range: 130-160 lb (59-73 kg).

⁸Vehicle mount weight range: 75-105 lb (34-48 kg).

^{**}Includes 1-ton trucks with dual rear wheels.

^{**}Includes 1-ton trucks with dual rear wheels.

^{*}Plow weight does not include vehicle mount weight.

"Vehicle mount weight range: 130-160 lb (59-73 kg).

**The tripping base angles on the DXT come standard with curb guards and patented snow catcher, and they can be used as the cutting edge until worn. The optional cutting edge is made from Hardox® for maximum wear resistance and durability.